



SR-11B182MPERC-B 182-91mm 11BB单晶PERC双面半片

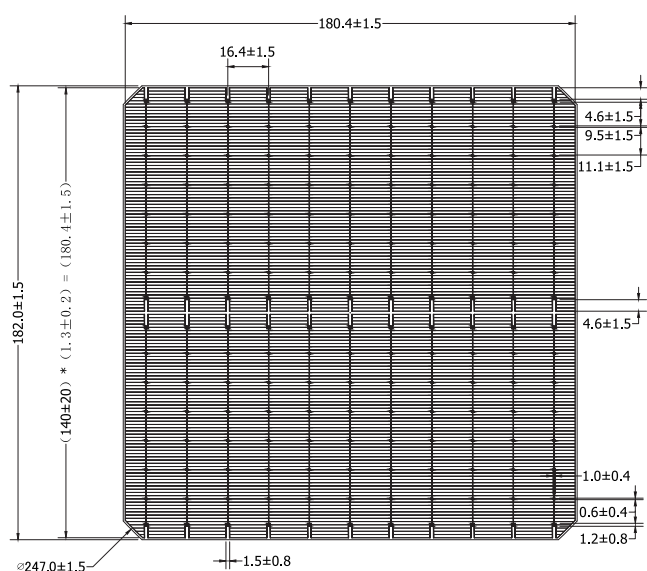

正面

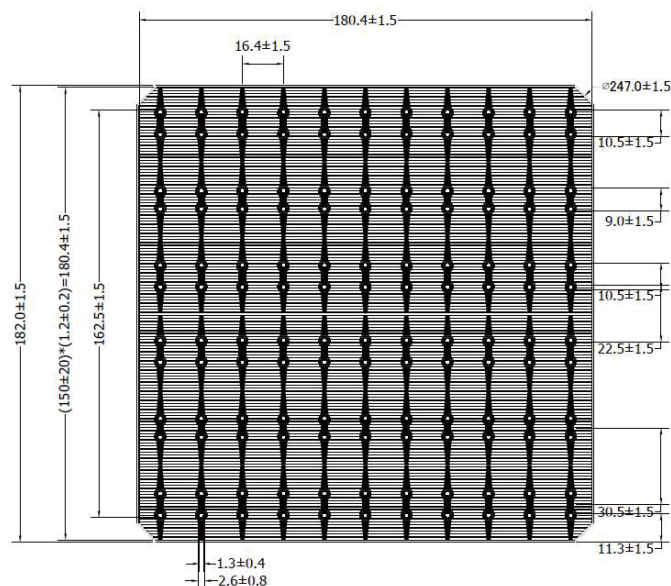

背面


尺寸: 182mm×182mm±1.5mm

厚度: 180±18 μm

温度系数

TkVoltage	-0.36 %/K
TkCurrent	+0.04%/K
TkPower	-0.36%/K

IV 曲线



电性能参数

效率(%)	最大输出功率(W)	最大输出电压(V)	最大输出电流(A)	开路电压(V)	短路电流(A)	填充因子(%)
23.50-24.00	7.76	0.602	12.891	0.688	13.641	82.69
23.40-23.50	7.73	0.601	12.862	0.687	13.627	82.58
23.30-23.40	7.70	0.599	12.855	0.686	13.614	82.45
23.20-23.30	7.66	0.598	12.811	0.685	13.599	82.24
23.10-23.20	7.63	0.597	12.781	0.684	13.588	82.10
23.00-23.10	7.60	0.595	12.774	0.683	13.575	81.97
22.90-23.00	7.57	0.593	12.766	0.682	13.567	81.82
22.80-22.90	7.53	0.591	12.743	0.681	13.549	81.61
22.70-22.80	7.49	0.589	12.718	0.680	13.539	81.36
22.60-22.70	7.46	0.587	12.709	0.679	13.529	81.21
22.50-22.60	7.43	0.585	12.701	0.678	13.516	81.08
22.40-22.50	7.40	0.583	12.693	0.677	13.508	80.92
22.30-22.40	7.36	0.581	12.668	0.676	13.491	80.71

标准测试条件: 1000W/m², AM1.5, 25°C,

背面电性能参数

Intensity (W/m ²)	Isc	Voc	Pmpp
1000	1.0	1.00	1.00
900	0.90	1.00	0.90
800	0.80	0.99	0.79
500	0.50	0.97	0.49
300	0.30	0.95	0.29
200	0.20	0.93	0.19

标准测试条件: 1000W/m², AM1.5, 25°C,

Spectral Response

